


O:\standets\REVISED 2024\REVISED-RENUMBERED 2024\SS-101.1.dwg, 1/31/2024 8:08:42 AM, 1:1



NOTES:

1. PRECAST MANHOLE SHALL BE 4000 PSI REINFORCED CONCRETE THAT CONFORMS TO ASTM C-478 (LATEST) AS MANUFACTURED BY: GILLESPIE PRECAST OR AN APPROVED EQUAL.
2. BENCH AND CHANNEL SHALL BE BRICK, PRECAST OR HAND FORMED CONCRETE. ELEVATION DROP ACROSS MANHOLE SHALL BE A MINIMUM OF 0.1' FROM INVERT IN TO INVERT OUT.
3. MANHOLE STEPS, FRAME AND COVER REQUIRED OVER EFFLUENT SIDE AS SHOWN.

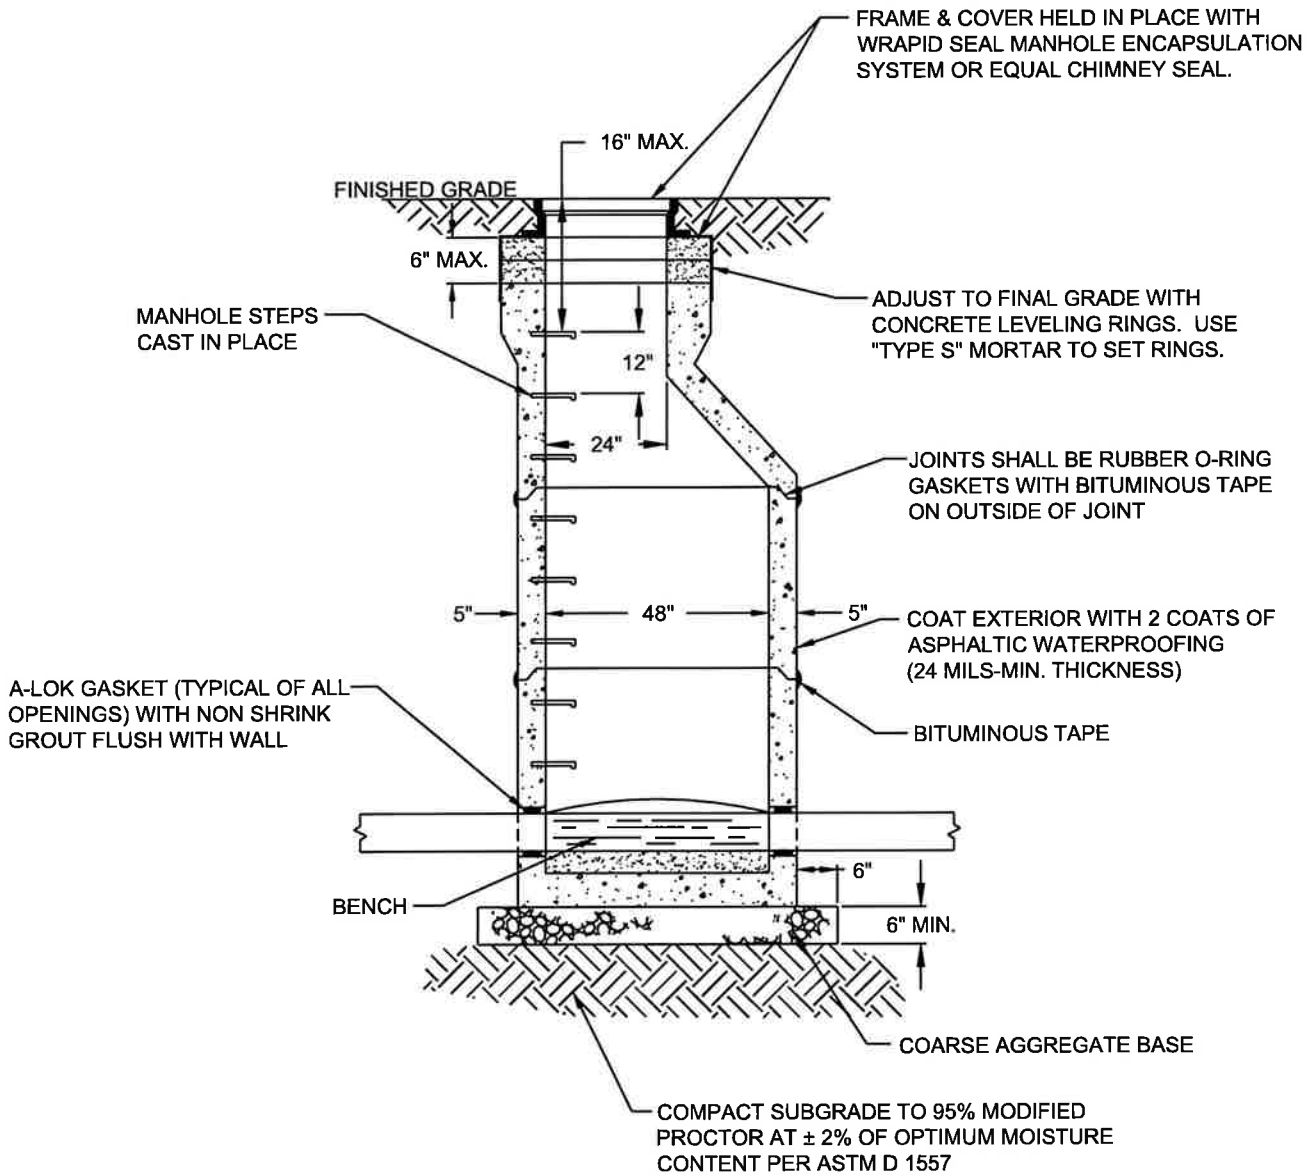

Life. Made better.™

	APPROVAL	REVISED	
	 EU ENGINEERING DEPARTMENT 1/31/2024 DATE		EASTON UTILITIES STANDARD DETAILS PRECAST CONCRETE MANHOLE
	ISSUED: JANUARY 2024		STANDARD NO.: SS-101.1