


O:\standets\REVISED 2024\REVISED-RENUMBERED 2024\SS-103.4.dwg, 1/31/2024 9:23:16 AM, 1:1



NOTES:

1. THE SINK OR FIXTURE MUST BE INSTALLED WITH INDIRECT DRAIN LINES TO MEET LOCAL PLUMBING CODES.
2. FOR 2 OR MORE SINKS, REDUCE EACH DRAIN TO A MAXIMUM OF 1" TO CONTROL THE FLOW TO THE GREASE RECOVERY DEVICE.
3. ACCEPTABLE UNITS ARE INTERNATIONAL GRD MODEL 25001B, HIGHLAND TANK MODEL AGI 25, OR APPROVED EQUAL.
4. SYSTEMS TO COMPLY WITH INTERNATIONAL PLUMBING CODE SECTION 1003.

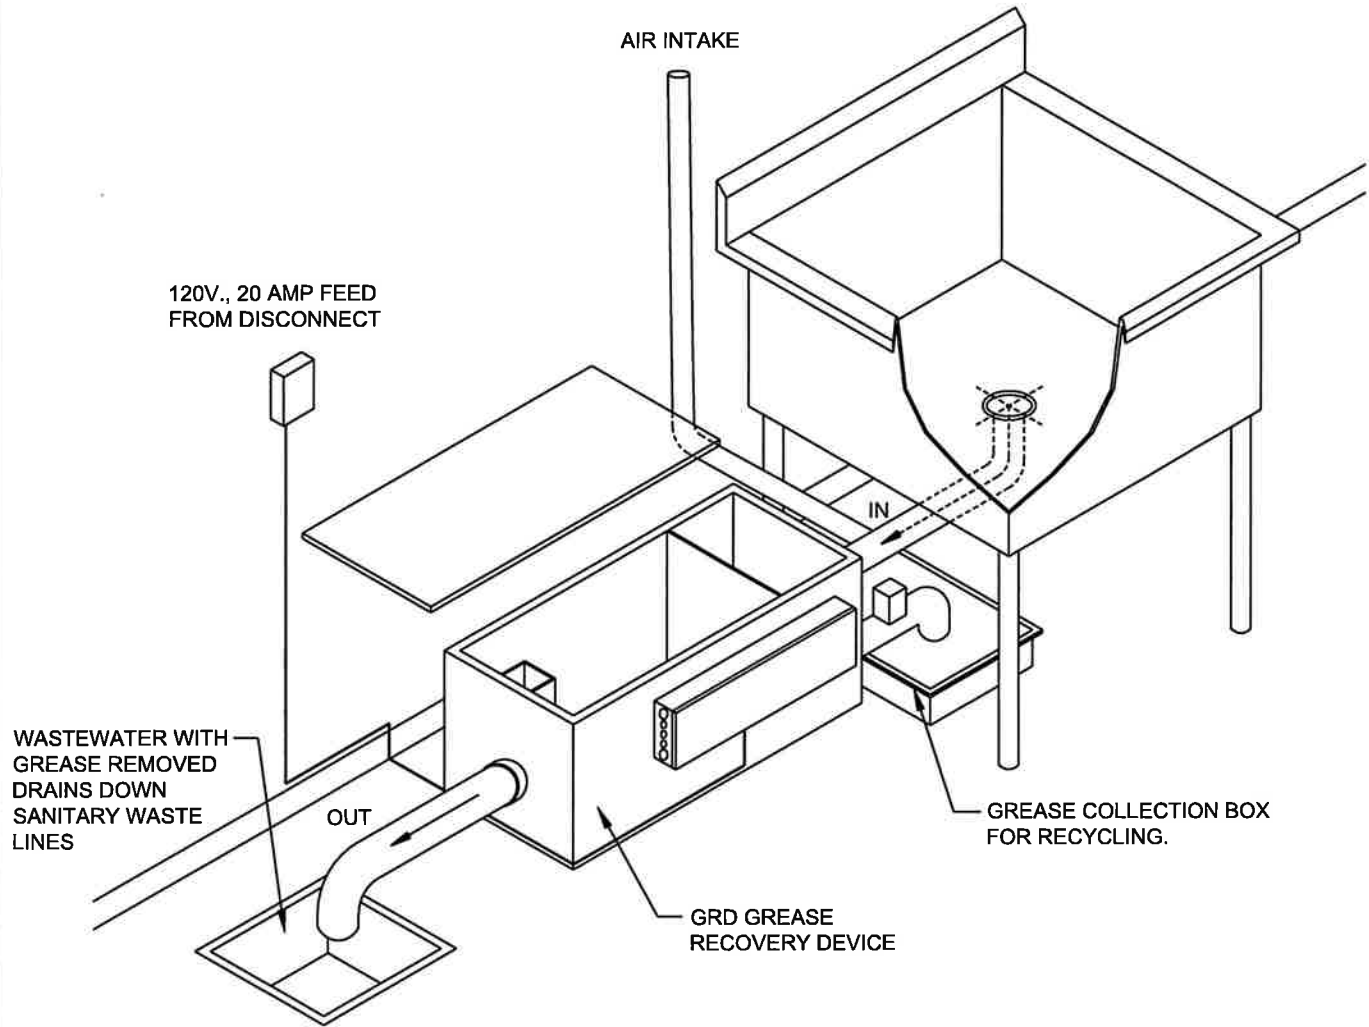

Life. Made better.™

	APPROVAL	REVISED	
	 EU ENGINEERING DEPARTMENT 1/31/2024 DATE		EASTON UTILITIES STANDARD DETAILS AUTOMATIC GREASE RECOVERY DEVICE
	ISSUED: JANUARY 2024		STANDARD NO.: SS-103.4