


O:\standets\REVISED 2024\REVISED-RENUMBERED 2024\W-100.2.dwg, 1/30/2024 10:50:31 AM, 1:1




NOTES:

1. USE SELECT GRANULAR BACKFILL ONLY.
2. PROVIDE AS MUCH SEPARATION AS PERMITTED BY TRENCH WIDTH.
3. TRENCH TAPE (WARNING TAPE) SHALL BE PLACED 12" ABOVE PIPE AND 12" ABOVE BELOW GROUND SURFACE.
4. GAS MAIN CONSTRUCTION BY EASTON UTILITIES IN ACCORDANCE WITH EASTON UTILITIES GAS CONSTRUCTION STANDARDS.
5. REINFORCED COATED TRACER WIRE AS MANUFACTURED BY COPPERHEAD INDUSTRIES, LLC, OR AN APPROVED EQUAL.
6. THOROUGHLY TAPE MECHANICAL CONNECTIONS OF TRACER WIRE WITH ELECTRICAL TAPE.

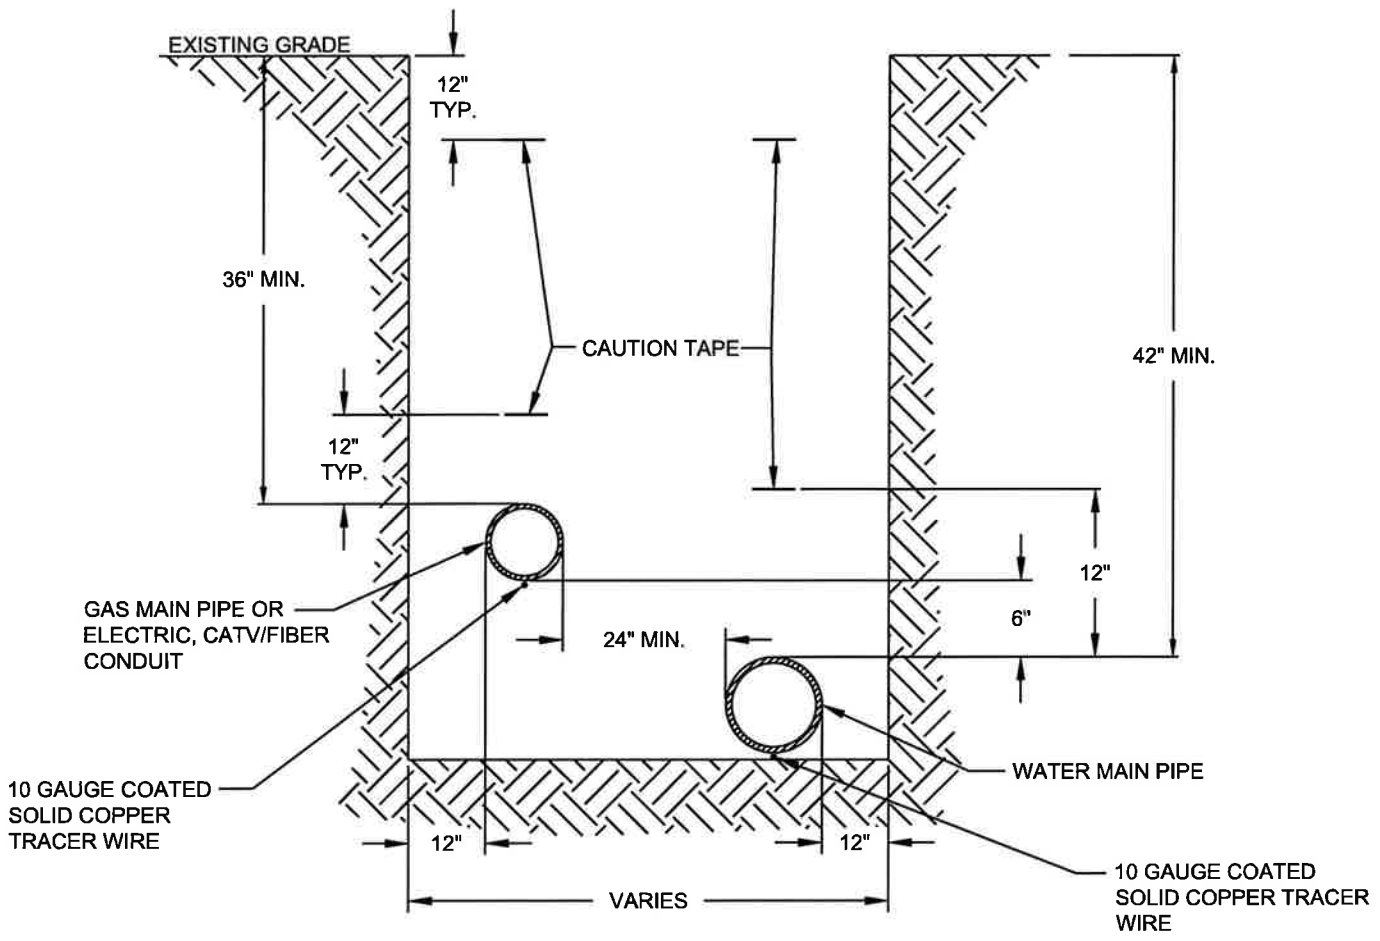

Life. Made better.™

	APPROVAL	REVISED	
	 EU ENGINEERING DEPARTMENT		EASTON UTILITIES STANDARD DETAILS
	<u>1/31/2024</u> DATE		WATER MAIN JOINT TRENCHING
	ISSUED: JANUARY 2024		STANDARD NO.: W-100.2